
ASSEMBLY GUIDE 5 RUNG LADDER DISPLAY

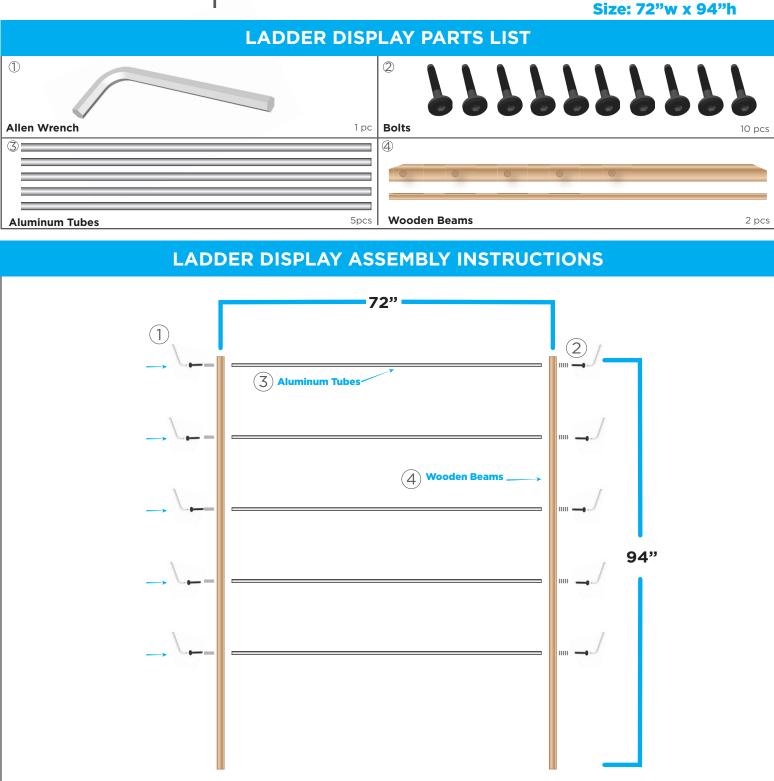

- Lay the 2 wooden beams on the ground, approximately 6 feet apart.
- Insert the 5 aluminum tubes into the holes in the beams.

RETAIL ENVIRONMENTS

• Insert bolts through the 1/4" holes in the beams, and tighten with the included Hex key.

Image: Solution placeFOR QUESTIONS CALL503.719.6867For more information please visit: nice.moso.design