


PARTS LIST

<p>① <b>Long Outer Bar</b> 2 pcs</p>		<p>⑤ <b>Foot</b> 2 pcs</p>	<p>⑥ <b>1/2" Phillips Screw</b> 3 pcs</p>
<p>② <b>Long Inner Bar</b> 1 pc</p>		<p>⑦ <b>1" Phillips Screw</b> 8 pcs</p>	<p>⑧ <b>Socket Screw</b> 8 pcs</p>
<p>③ <b>Short Outer Bar</b> 2 pcs</p>	<p>④ <b>Short Inner Bar</b> 3 pcs</p>	<p>⑨ <b>Allen Key</b> 1 pc</p>	


ASSEMBLY INSTRUCTIONS

STEP 1

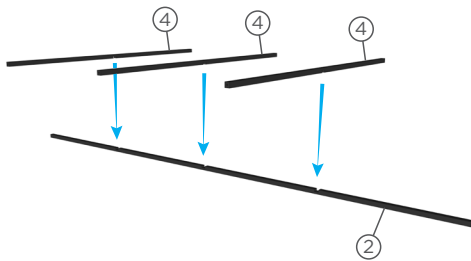


Assemble the inner part of the frame by inserting the notches of the **short inner bars**<sup>4</sup> into the notches of the **long inner bar**<sup>2</sup> as shown.

STEP 2

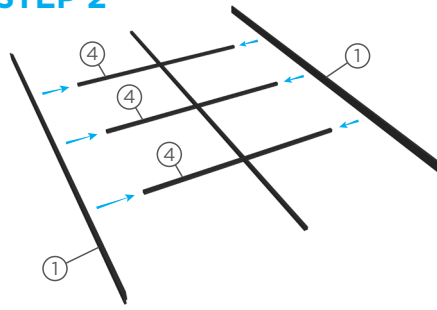





Making sure matching ends of the **long outer bars**<sup>1</sup> are facing the same way, insert the ends of the **short inner bars**<sup>4</sup> into the depressions of the long outer bars.

STEP 3

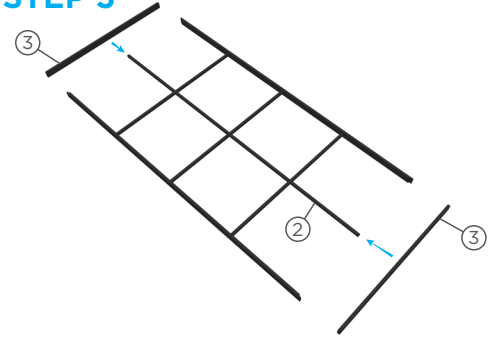


Attach the **short outer bars**<sup>3</sup> by inserting the end of the **long inner bar**<sup>2</sup> into the depressions of the short outer bars.

STEP 4

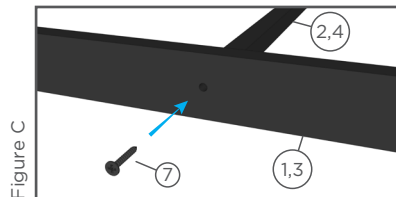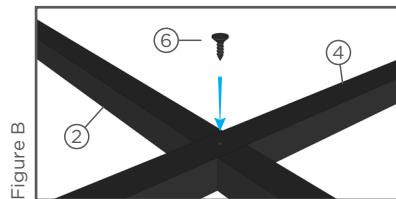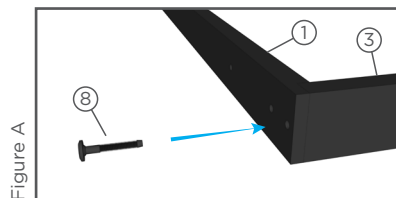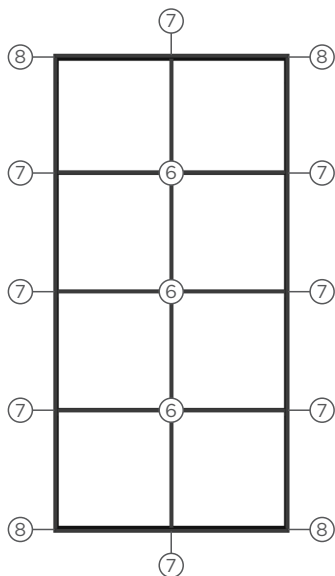

Secure the bars with the various screws using a phillips screwdriver and the provided **allen key**<sup>9</sup> in the following order... Step 1 (Fig. A): The **socket screws**<sup>8</sup> secure the outer bars to each other. Step 2 (Fig. B): The **1/2" phillips screws**<sup>6</sup> secure the intersections of the inner bars. Step 3 (Fig. C): The **1" phillips screws**<sup>7</sup> secure the ends of the inner bars to the outer bars.

STEP 5

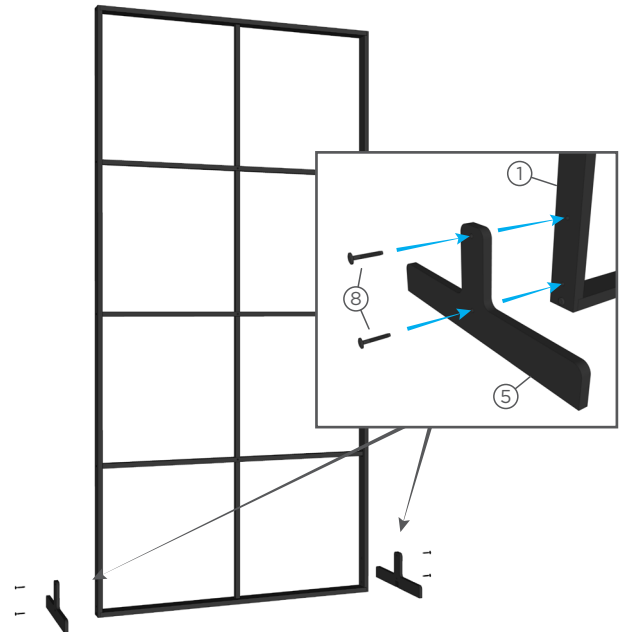

With the slight square depression at the base of the foot facing the frame, attach the **feet**<sup>5</sup> to the ends of the **long outer bars**<sup>1</sup> using two **sockets screws**<sup>8</sup> per foot. The frame is now fully assembled.