


PARTS LIST

① <b>Long Outer Bar</b>	2 pcs	⑤ <b>Foot</b>	2 pcs	⑥ <b>1/2" Phillips Screw</b>	6 pcs
② <b>Long Inner Bar</b>	2 pcs	⑦ <b>1" Phillips Screw</b>	10 pcs	⑧ <b>Socket Screw</b>	8 pcs
③ <b>Short Outer Bar</b>	2 pcs	⑨ <b>Allen Key</b>	1 pc		
④ <b>Short Inner Bar</b>	3 pcs				


ASSEMBLY INSTRUCTIONS

STEP 1

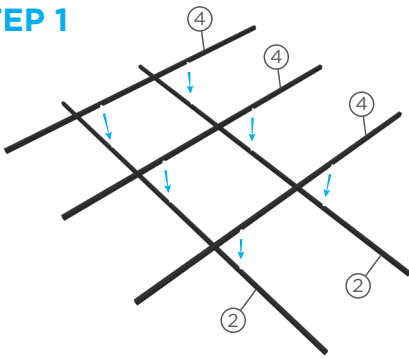


Assemble the inner part of the frame by inserting the notches of the **short inner bars**<sup>4</sup> into the notches of the **long inner bar**<sup>2</sup> as shown.

STEP 2

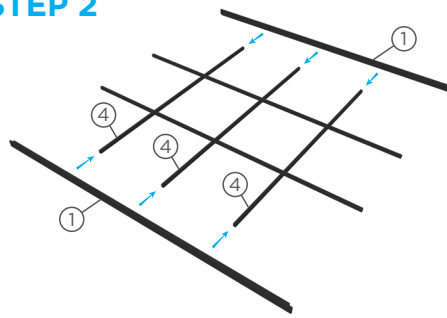





Making sure matching ends of the **long outer bars**<sup>1</sup> are facing the same way, insert the ends of the **short inner bars**<sup>4</sup> into the depressions of the long outer bars.

STEP 3

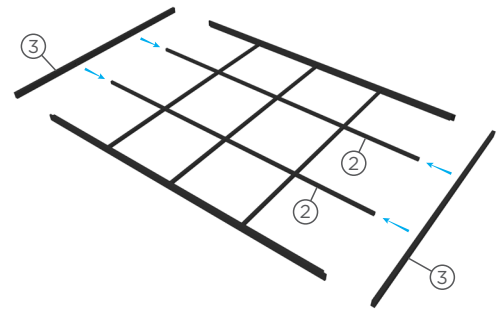


Attach the **short outer bars**<sup>3</sup> by inserting the end of the **long inner bar**<sup>2</sup> into the depressions of the short outer bars.

STEP 4

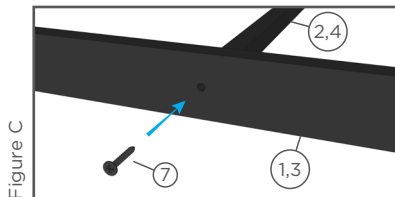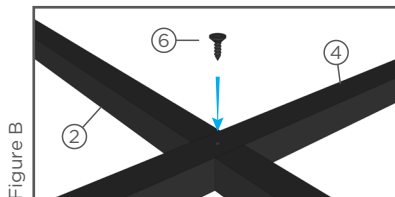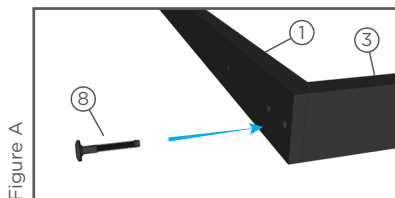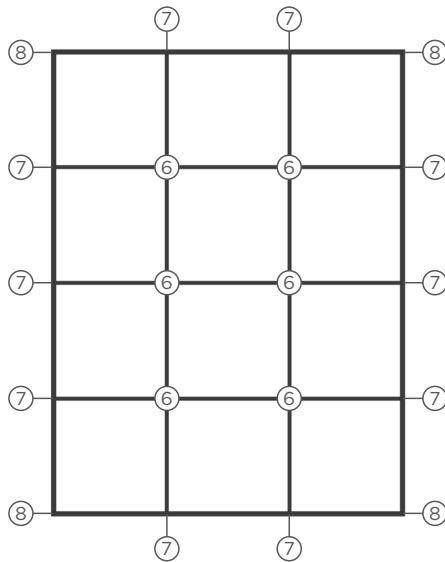

Secure the bars with the various screws using a phillips screwdriver and the provided **allen key**<sup>9</sup> in the following order... Step 1 (Fig. A): The **socket screws**<sup>8</sup> secure the outer bars to each other. Step 2 (Fig. B): The **1/2" phillips screws**<sup>6</sup> secure the intersections of the inner bars. Step 3 (Fig. C): The **1" phillips screws**<sup>7</sup> secure the ends of the inner bars to the outer bars.

STEP 5

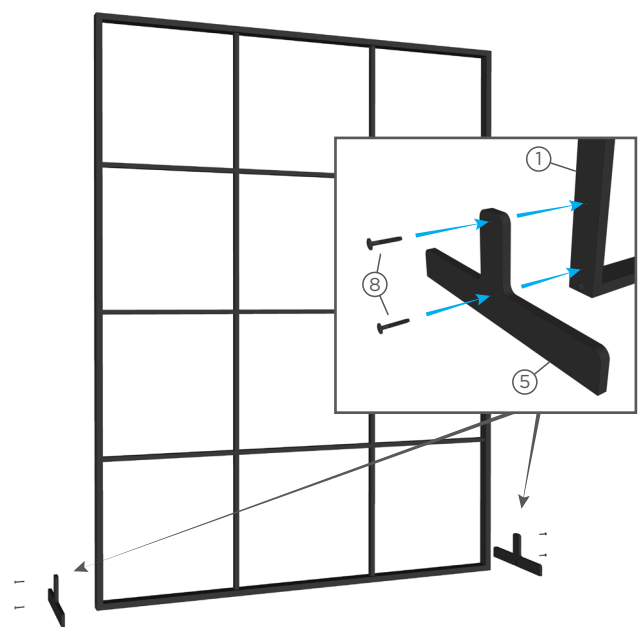

With the slight square depression at the base of the foot facing the frame, attach the **feet**<sup>5</sup> to the ends of the **long outer bars**<sup>1</sup> using two **sockets screws**<sup>8</sup> per foot. The frame is now fully assembled.